



SUPERTREAD



GRATING PACIFIC

Service. Quality. Reliability.

Stair Nosings & Treads

www.gratingpacific.com








CAST NOSINGS & TREADS

SuperTread Stair Nosings and Treads are sand finish castings with abrasive embedded to a minimum depth of 1/16 inch in the wear surface. Cross hatching or fluting is clean and well defined to a minimum depth of 1/16 inch.









AVAILABLE IN: CAST IRON, CAST ALUMINUM AND CAST BRONZE ABRASIVE IN LENGTHS UP TO 8'-0"



STAIR NOSINGS

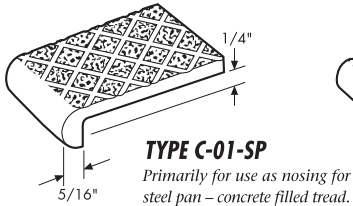


STRUCTURAL TREADS

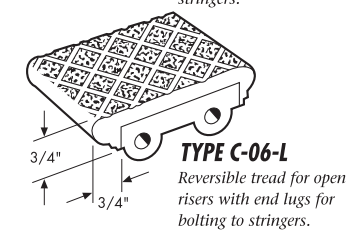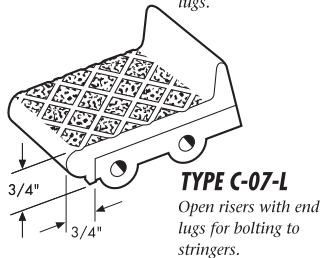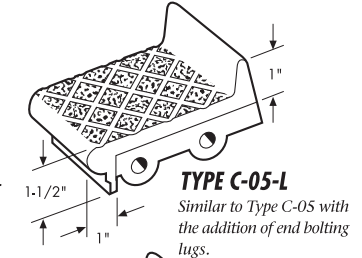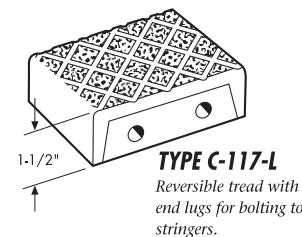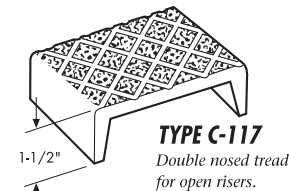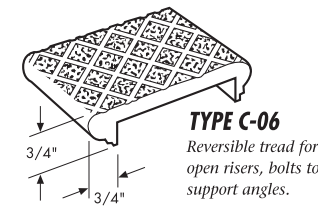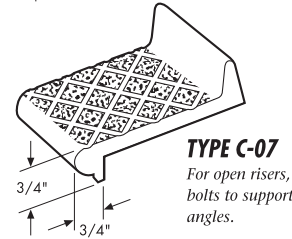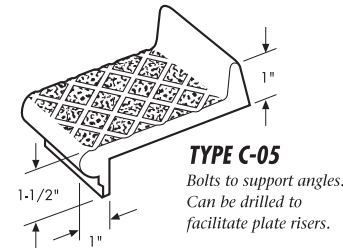

TYPICAL SPACING FOR HOLES IN END LUGS AND DRILLING FOR CARRIER ANGLES


1-3/8"	1-1/4" for 4" Wide Tread	1-3/8"
1-1/2"	2" for 5" Wide Tread	1-1/2"
1-1/2"	3" for 6" Wide Tread	1-1/2"
1-3/4"	3-1/2" for 7" Wide Tread	1-3/4"
2"	4" for 8" Wide Tread	2"
2"	5" for 9" Wide Tread	2"
2"	6" for 10" Wide Tread	2"
2"	7" for 11" Wide Tread	2"
2"	8" for 12" Wide Tread	2"

SURFACES

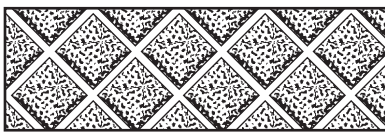


CROSS HATCHED STANDARD

Also Available




FLUTED




PLAIN

ANCHORS



STANDARD
1-1/2" deep steel wing anchor.



OPTIONAL
Concealed integral cast anchor.


MINIMUM THICKNESS FOR VARIOUS CASTING SIZES

CAST IRON		ALUMINUM	
WIDTH	THICKNESS	WIDTH	THICKNESS
To 6"	5/16"	To 12"	5/16"
To 12"	3/8"	To 24"	3/8"
To 36"	1/2"	To 30"	1/2"
To 40"	5/8"	To 40"	5/8"


CURB BARS



TYPE CB-150
1-1/2" x 1-1/2" x 3/8" thick.



TYPE CB-250
2-1/2" x 2-1/2" x 1/2" thick.




ANCHORS BENT TO SHAPE PRIOR TO INSTALLATION IN FIELD.

EXTRUDED ALUMINUM NOSINGS


SuperTread Extruded Aluminum Nosings are manufactured with a base container of 6063-T5 extruded aluminum filled with an abrasive mixture of aluminum oxide and silicon blend, compacted and bonded by 100% solid epoxy. Manufactured in lengths up to 24'-0".

STANDARD COLORS ARE BLACK AND YELLOW. FOR ADDITIONAL COLORS, SEE COLOR CHART ON BACK OF CATALOG.

TYPE XRS-3

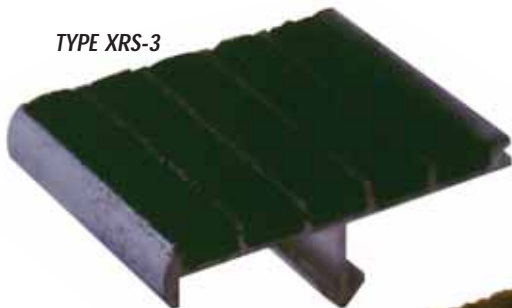


All nosings can be shipped with factory applied protective tape for a nominal charge, providing protection of exposed surfaces during installation.

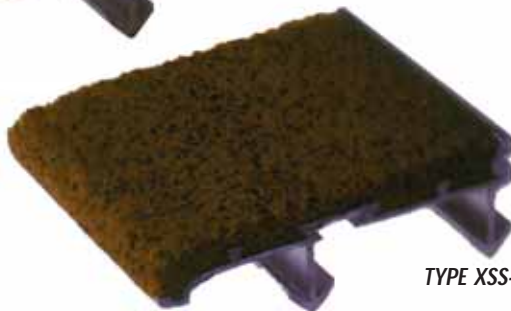

TYPE XSS-3


STATE OF CALIFORNIA TITLE 24 SAFETY STRIP

TYPE CT-24-A




With extruded anchor for poured stairs.

TYPE CT-24-H



With holes for screws and fasteners.





Meets all requirements of California Title 24 safety strip for the visually impaired.




SuperTread Nosings conform with the design requirements of OSHA's barrier-free code for stairs in public buildings.

SOLID ABRASIVE NOSINGS

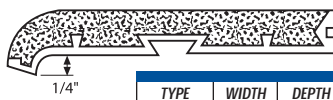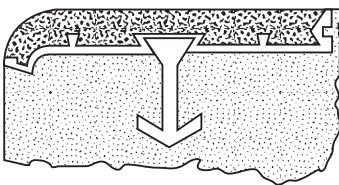

TYPE	WIDTH	DEPTH
XSS-2	2"	3/8"
XSS-3	3"	3/8"
XSS-4	4"	3/8"

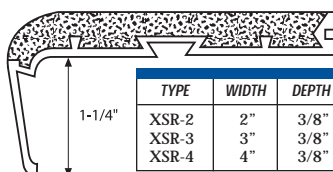


TYPE	WIDTH	DEPTH
XSR-2	2"	3/8"
XSR-3	3"	3/8"
XSR-4	4"	3/8"



GRATING PACIFIC

Service. Quality. Reliability.


RIBBED ABRASIVE NOSINGS




TYPE	WIDTH	DEPTH	RIBS
XRS-2	2"	1/4"	3
XRS-3	3"	1/4"	5
XRS-4	4"	1/4"	7




TYPE	WIDTH	DEPTH	RIBS
XRF-1.3	1-3/8"	1/4"	2
XRF-3	3"	1/4"	5



TYPE	WIDTH	DEPTH	RIBS
XRL-2	2"	1/4"	3
XRL-3	3"	1/4"	5
XRL-4	4"	1/4"	7




TYPE	WIDTH	DEPTH	RIBS	TILE
XTS-2	2"	1/4"	3	1/8"
XTS-3	3"	1/4"	5	1/8"
XTS-4	4"	1/4"	7	1/8"




TYPE	WIDTH	DEPTH	RIBS	TILE
XTL-2	2"	1/4"	3	1/8"
XTL-3	3"	1/4"	5	1/8"
XTL-4	4"	1/4"	7	1/8"

ABRASIVE NOSINGS FOR STEEL PAN STAIRS




BARRIER FREE DESIGN



TYPE	WIDTH	DEPTH	RIBS
XRS-2-BF	2"	1/4"	3
XRS-3-BF	3"	1/4"	5
XRS-4-BF	4"	1/4"	7


BARRIER FREE DESIGN



TYPE	WIDTH	DEPTH
XSS-2-BF	2"	3/8"
XSS-3-BF	3"	3/8"
XSS-4-BF	4"	3/8"



TYPE	WIDTH	DEPTH
XSB-2	2"	3/8"
XSB-3	3"	3/8"
XSB-4	4"	3/8"




TYPE	WIDTH	DEPTH	RIBS
XRR-3	3"	1/4"	5


ANCHOR OPTIONS



STANDARD CONTINUOUS
EXTRUDED



STRAP ANCHORS
1" wide, 12" O.C.±



LEAD TAMPIN
For existing concrete.




WOOD SCREWS
For existing wood stairs.



WING ANCHORS
1" wide, 12" O.C.±


EXTRUDED ALUMINUM STAIRCOVERS

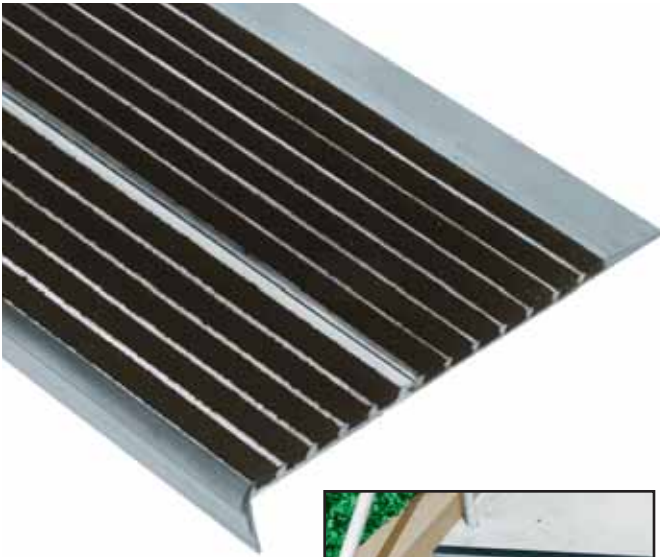

Designed for the renovation of existing stairs, SuperTread Extruded Aluminum Staircovers fit over worn stairs and walking surfaces. Covers are available in a variety of widths from 6 to 11 inches (widths exceeding 6" are provided in two pieces) and lengths up to 20'-0". Installation is easily accomplished with lead tampins or wood screws. Nosings are available as shown while the back ends can be provided square or bevel cut. By using a combination of tongue-and-groove pieces, entire platforms can be covered providing safe, renewed walking surfaces.




TYPE XCL-B

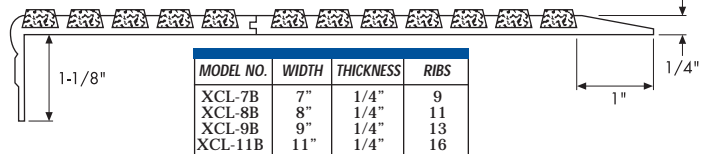


MODEL NO.	WIDTH	THICKNESS	RIBS
XCL-7B	7"	1/4"	9
XCL-8B	8"	1/4"	11
XCL-9B	9"	1/4"	13
XCL-11B	11"	1/4"	16

TYPE XCL

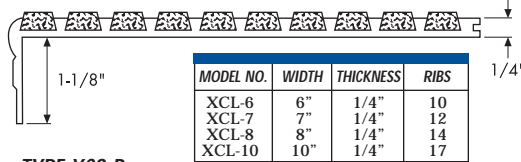


MODEL NO.	WIDTH	THICKNESS	RIBS
XCL-6	6"	1/4"	10
XCL-7	7"	1/4"	12
XCL-8	8"	1/4"	14
XCL-10	10"	1/4"	17

TYPE XCS-B

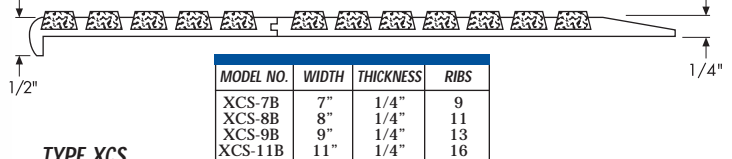


MODEL NO.	WIDTH	THICKNESS	RIBS
XCS-7B	7"	1/4"	9
XCS-8B	8"	1/4"	11
XCS-9B	9"	1/4"	13
XCS-11B	11"	1/4"	16

TYPE XCS

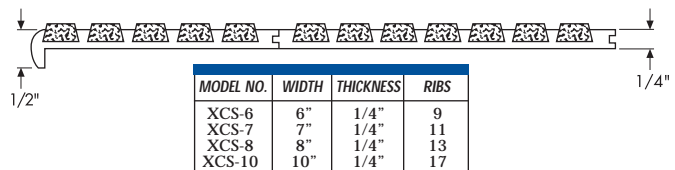


MODEL NO.	WIDTH	THICKNESS	RIBS
XCS-6	6"	1/4"	9
XCS-7	7"	1/4"	11
XCS-8	8"	1/4"	13
XCS-10	10"	1/4"	17

TYPE XCR-B




MODEL NO.	WIDTH	THICKNESS	RIBS
XCR-8B	8"	1/4"	11

TYPE XCR



MODEL NO.	WIDTH	THICKNESS	RIBS
XCR-7	7"	1/4"	12

COLORS AVAILABLE

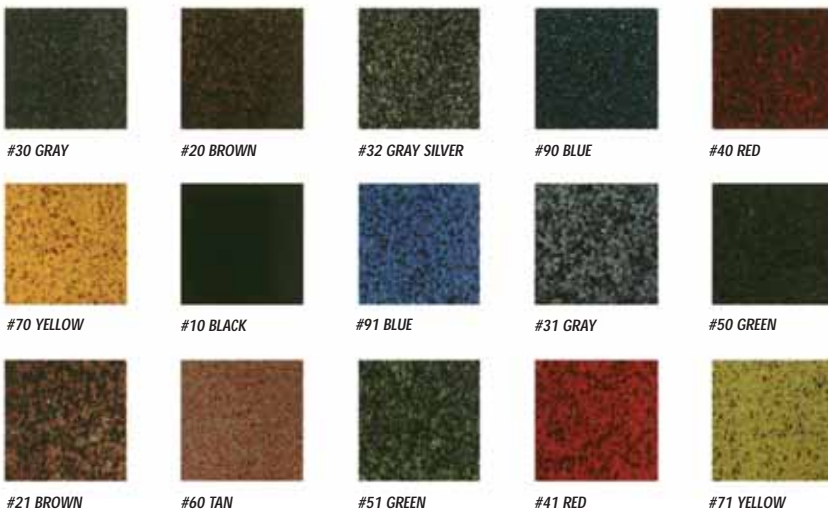

SuperTread abrasive filler is readily available in 15 basic colors. The coloring pigment is blended with the abrasive filler assuring consistent color tone throughout the entire depth of the tread providing long lasting beauty. Black is stock standard color and will be supplied unless a optional color is specified. Special color blends are available upon request. Color samples are also available upon request.

SUPER TREAD



GRATING PACIFIC

Service. Quality. Reliability.

www.gratingpacific.com

Southern California
3651 Sausalito St., Los Alamitos, CA 90720
TEL (800) 321-4314 • FAX (562) 598-2740

Central/Northern California
1398 Mariani Court, Unit 120, Tracy, CA 95376
TEL (800) 491-7999 • FAX (209) 832-6311

Oregon
2775 N. Front St., Woodburn, OR 97071
TEL (800) 942-4041 • FAX (503) 980-2068

Washington
18340 Andover Park West, Tukwila, WA 98188
TEL (800) 243-3939 • FAX (206) 575-6455